

PAITEC ES5500


Convenient, compact and dynamic pressure sealer ideal for the office desktop.

Specifications

Speed, forms per hour	5,500
Form sizes, inches	Up to 14 depth, up to 9 width
Input tray	150 pressure seal forms
Counter	Item and batch
Noise level	Less than 45 db
Dimensions (W x L x H), inches	13 x 15 x 11
Weight, pounds	54
Electrical requirement	110v AC



Fold setting:

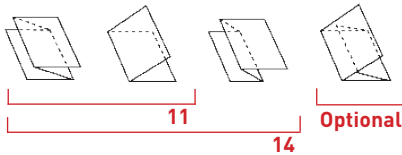


Double feed detection to stop misfeeds. Includes a long 240mm fold plate to handle all folds except 14" C fold (a 270mm fold plate to process 14" C fold is available to swap with the 240mm for an additional charge). Exclusive angled seal technology. LCD touch pad controls with counter. Processes more than 5,500 forms per hour. Deep 150 sheet feed table. Seals single-sheet self mailers. No envelope needed. Compact and dynamic design which features a small foot print ideal for the office desktop.

Features



DEEP 150 SHEET FEED TABLE

The ES5500 feed table holds up to 150 sheets of pressure seal forms at a time.

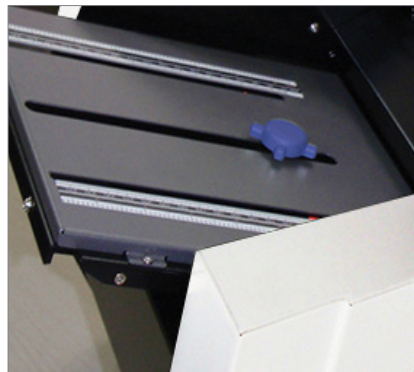

DOUBLE FEED DETECTION

Advanced sensors detect double feeds and automatically stop the ES5500 to prevent jams.



LCD TOUCH PAD CONTROL WITH COUNTER

Easy to use touch pad with buttons for double feed detection, item and batch counter, and other controls.