

MBM 352S

High speed, air feed folder ideally suited for high-volume digital production.

Speed, sheets per hour	30,000*
Paper size, inches	3 3/8 x 4 3/4 to 12 5/8 x 17 3/4
Paper weight, pounds	13-110*
Sheet capacity	450*

*May vary due to variations in paper.



Air suction feed system, suitable for coated stocks. Adjusts in seconds for standard and custom folds. Variable speed control. Powered exit conveyor. Bottom-feed, top-loading design for continuous reloading and dependable sheet separation. Polyurethane foam rollers eliminate the need for fold roller pressure settings. Turbine blower fully enclosed for quiet operation. 2 fold plates. Heavy-duty, non-flexing side frames. Needle bearings for high speed production. Mounted on casters. Optional extended delivery system, crossfold for right-angle folding, and slitting, scoring, and perforating attachments.

Specifications

Electrical requirements	115 V, 60 Hz**
Dimensions (D x W x H), inches	22 1/4 x 51 1/4 x 43 1/2
Shipping weight, pounds	312

**20 amp dedicated line required.

WWW.MBMCORP.COM
TEL: 800-223-2508

WWW.IDEAL-MBM.COM
TEL: 800-387-2528


MBM 352S

Features



ENCLOSED TURBINE BLOWER

The low-maintenance blower does not require filter changes.

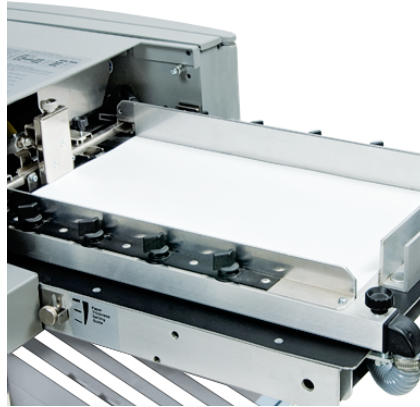

TOP-LOADING PAPER FEED

A top-loading paper feed system allows continuous operation.

Accessories:

- AC0623: Silencing covers
- AC0630: Slitter
- AC0631: Scorer, narrow
- AC0632: Scorer, medium
- AC0633: Scorer, broad
- AC0646: Extended delivery
- AC0690: Standard perforator, short
- AC0691: Standard perforator, medium
- AC0692: Blade perforator, short
- AC0693: Blade perforator, medium
- AC0694: Blade perforator, long

