



The features you deserve.

Made In Germany

Eco Friendly

Lifetime Guarantee*

Top Service

ECC

Auto Oiler

SSC Control

Easy Switch

Easy Touch

Zero Energy

SPS Safety Protection System includes: Transparent Safety Shield, automatic reverse and stop, power cut-off when the cabinet is opened or the bin is full, electronic door protection, and double protection against overheating.

- 100% German-made with the highest safety standards. ✓
- Best warranty in the industry. ✓
- A return rate of less than 1%. ✓
- First shredder to be awarded the "Blue Angel" certification. ✓
- Promotes free trade through the Trade Agreement Act. ✓
- Zero Energy Consumption is standard with every model. ✓
- Superior customer and technical service. ✓
- Same-day shipping. ✓

**Super micro-cut and High Capacity shafts are covered by a one-year limited warranty.*

DESTROYIT

versatility
shred receipts to office paper to cds/dvds and more

sheet capacity
5 to 700 sheets

throat opening
8 3/4" to 20"

range of options
over 30 models

security levels
p-2 to p-7

mobility
lightweight models and casters for mobility



The essential security measure.

Shredding documents before they leave the building is the only way to be sure they are properly destroyed. Using a shred service is relinquishing control of your data security program. A stranger is put in possession of your sensitive materials.

If you use a shredding service, documents are leaving the building intact, in the hands of strangers. The false sense of security they provide is accompanied by a never-ending expense which will only increase over time. That's why shredding at the source with Destroyit shredders should be the foundation of every data security program.



MBM
CORPORATION

3134 Industry Drive
North Charleston, SC 29418
843-552-2700
www.mbmcorp.com

IDEAL.MBM
CORPORATION

945B Southgate Drive
Guelph, ON N1L 0B9
800-387-2528
www.ideal-mbm.com

DESTROYIT



PAPER SHREDDERS






From desktide to high capacity, industrial shredders.

Top quality, Made in Germany.
















DESKSIDE

Deskside shredders put effective data security right at your side. Unlike cheaper brands, they are built with the highest quality materials and construction standards to provide years of dependable service.

| Model | Strip width / particle size | Feed opening, inches | Sheet capacity¹ | Security level (DIN 66399) | Shredding capabilities (non-paper) | Shred speed, ft. / min. | Shred volume, gallons | Electrical requirements, volts | Maximum horsepower | Automatic oil injection / SSC² / ECC³ | Dimensions (D x W x H), inches | Shipping weight, pounds |
|----------------------|---------------------------------|----------------------|-----------------|----------------------------|---|-------------------------|-----------------------|--------------------------------|--------------------|---------------------------------------|--------------------------------|-------------------------|
| 2265 cross-cut | 1/8 x 1 inches (3 x 25 mm) | 8 3/4 | 5-6 | P-4 |  | 12 | 5 | 115 | 1/5 (.15 kw) | – | 8 3/4 x 13 1/2 x 21 | 28 |
| 2445 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 9 1/2 | 11-13 | P-4 |  | 14 | 9 | 115 | 1/2 (.39 kw) | SSC | 11 3/4 x 15 1/2 x 28 3/4 | 53 |
| 2445 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 9 1/2 | 6-8 | P-5 |  | 14 | 9 | 115 | 1/2 (.39 kw) | SSC | 11 3/4 x 15 1/2 x 28 3/4 | 53 |
| 2445 super micro-cut | 1/32 x 3/16 inches (.8 x 5 mm) | 9 1/2 | 5-7 | P-7 | – | 14 | 9 | 115 | 1/2 (.39 kw) | SSC | 11 3/4 x 15 1/2 x 25 | 53 |
| 2465 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 9 1/2 | 13-15 | P-4 |  | 27 | 9 | 115 | 3/4 (.58 kw) | SSC | 11 1/2 x 15 1/2 x 25 | 58 |
| 2465 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 9 1/2 | 9-11 | P-5 |  | 27 | 9 | 115 | 3/4 (.58 kw) | SSC | 11 1/2 x 15 1/2 x 25 | 58 |







CENTRALIZED OFFICE

Centralized Office models are commercial grade, high volume machines specifically designed to shred large amounts of material daily. Ideally, they are placed in a common area and shared by employees.

| Model | Strip width / particle size | Feed opening, inches | Sheet capacity¹ | Security level (DIN 66399) | Shredding capabilities (non-paper) | Shred speed, ft. / min | Shred volume, gallons | Electrical requirements, volts | Maximum horsepower | Automatic oil injection / SSC² / ECC³ | Dimensions (D x W x H), inches | Shipping weight, pounds |
|----------------------|---------------------------------|----------------------|-----------------|----------------------------|---|------------------------|-----------------------|--------------------------------|--------------------|---------------------------------------|--------------------------------|-------------------------|
| 2503 strip-cut | 3/16 inch (4 mm) | 10 1/4 | 19-21 | P-2 |  | 24 | 20 | 115 | 3/4 (.58 kw) | – | 14 3/4 x 19 3/4 x 34 1/4 | 78 |
| 2503 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 10 1/4 | 12-14 | P-4 |  | 24 | 20 | 115 | 3/4 (.58 kw) | – | 14 3/4 x 19 3/4 x 34 1/4 | 78 |
| 2503 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 10 1/4 | 8-10 | P-5 |  | 24 | 20 | 115 | 3/4 (.58 kw) | – | 14 3/4 x 19 3/4 x 34 1/4 | 78 |
| 2604 strip-cut | 3/16 inch (4 mm) | 10 1/4 | 27-30 | P-2 |  | 18 | 26 | 115 | 1 (.64 kw) | ECC | 18 1/2 x 19 1/2 x 36 1/2 | 123 |
| 2604 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 10 1/4 | 23-25 | P-4 |  | 18 | 26 | 115 | 1 (.64 kw) | ECC & auto oil | 18 1/2 x 19 1/2 x 36 1/2 | 123 |
| 2604 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 10 1/4 | 14-16 | P-5 |  | 18 | 26 | 115 | 1 (.64 kw) | ECC & auto oil | 18 1/2 x 19 1/2 x 36 1/2 | 123 |
| 2604 super micro-cut | 1/32 x 3/16 inches (.8 x 5 mm) | 10 1/4 | 6-8 | P-7 | – | 28 | 26 | 115 | 1 (.64 kw) | ECC & auto oil | 18 1/2 x 19 1/2 x 36 1/2 | 123 |
| 3104 strip-cut | 3/16 inch (4 mm) | 12 | 27-30 | P-2 |  | 18 | 32 | 115 | 1 (.64 kw) | ECC | 18 1/2 x 21 x 36 1/2 | 132 |
| 3104 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 12 | 22-25 | P-4 |  | 18 | 32 | 115 | 1 (.64 kw) | ECC | 18 1/2 x 21 x 36 1/2 | 132 |
| 3104 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 12 | 14-17 | P-5 |  | 18 | 32 | 115 | 1 (.64 kw) | ECC | 18 1/2 x 21 x 36 1/2 | 132 |
| 3105 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 12 | 37-39 | P-4 |  | 30 | 37 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 x 22 x 40 | 324 |
| 3105 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 12 | 24-26 | P-5 |  | 30 | 37 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 x 22 x 40 | 324 |
| 3804 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 16 | 24-26 | P-4 |  | 20 | 44 | 115 | 1 (.64 kw) | ECC | 23 1/4 x 25 1/4 x 38 1/4 | 233 |
| 3804 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 16 | 12-14 | P-5 |  | 20 | 44 | 115 | 1 (.64 kw) | ECC | 23 1/4 x 25 1/4 x 38 1/4 | 233 |
| 4002 strip-cut | 1/4 inch (6 mm) | 16 | 32-35 | P-2 |  | 30 | 44 | 115 | 1 3/4 (1.3 kw) | ECC | 23 1/4 x 25 1/4 x 38 1/4 | 239 |
| 4002 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 16 | 24-26 | P-4 |  | 25 | 44 | 115 | 1 3/4 (1.3 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 38 1/4 | 240 |
| 4002 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 16 | 14-16 | P-5 |  | 25 | 44 | 115 | 1 3/4 (1.3 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 38 1/4 | 240 |
| 4005 strip-cut | 1/4 inch (6 mm) | 16 | 50-52 | P-2 |  | 40 | 44 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 39 3/4 | 343 |
| 4005 cross-cut | 3/16 x 1 1/2 inches (4 x 40 mm) | 16 | 37-39 | P-4 |  | 30 | 44 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 39 3/4 | 378 |
| 4005 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 16 | 24-26 | P-5 |  | 30 | 44 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 39 3/4 | 378 |
| 4005 super micro-cut | 1/32 x 3/16 inches (.8 x 5 mm) | 16 | 10-12 | P-7 | – | 44 | 44 | 115⁴ | 2 1/8 (1.6 kw) | ECC & auto oil | 23 1/4 x 25 1/4 x 39 3/4 | 390 |

HIGH CAPACITY

A High Capacity in-house shredding program designed around Destroyit is the most secure and economical way of efficiently disposing large amounts of sensitive documents.

| Model | Strip width / particle size | Feed opening, inches | Sheet capacity¹ | Security level (DIN 66399) | Shredding capabilities (non-paper) | Shred speed, ft. / min. | Shred volume, gallons | Electrical requirements, volts | Maximum horsepower | Centralized oil injection | Dimensions (D x W x H), inches | Shipping weight, pounds |
|----------------|--|----------------------|-----------------|----------------------------|---|-------------------------|-----------------------|--------------------------------|--------------------|---------------------------|--------------------------------|-------------------------|
| 4606 cross-cut | 1/4 x 2 inches (6 x 50 mm) | 18 | 50-60 | P-3 |  | 40 | 61 | 220, 3 phase | 7 1/3 (2.2 kw) | ✓ | 30 x 29 x 67 | 715 |
| 4606 cross-cut | 3/32 x 5/8 inches (2 x 15 mm) | 18 | 32-37 | P-5 |  | 40 | 61 | 220, 3 phase | 7 1/3 (2.2 kw) | ✓ | 30 x 29 x 67 | 715 |
| 4108 strip-cut | 1/4 inch (6 mm) | 16 | 75-95 | P-2 |  | 60 | 79 | 220, 3 phase | 10 (4 kw) | ✓ | 67 x 48 3/4 x 56 3/4⁵ | 994 |
| 4108 cross-cut | 1/4 x 2 inches (6 x 50 mm) | 16 | 65-82 | P-3 |  | 53 | 79 | 220, 3 phase | 8 (3 kw) | ✓ | 67 x 48 3/4 x 56 3/4⁵ | 983 |
| 5009 cross-cut | 11/ 32 x 1 1/2-3 inches (8 x 40-80 mm) | 20 | 600-700 | P-2 |  | 24-46⁶ | 79 | 220, 3 phase⁷ | 24 (9 kw) | ✓ | 85 1/2 x 40 3/4 x 67 1/2⁸ | 3,080 |
| 5009 cross-cut | 1/4 x 2 inches (6 x 50 mm) | 20 | 300-400 | P-3 |  | 24-45⁶ | 79 | 220, 3 phase⁷ | 24 (9 kw) | ✓ | 85 1/2 x 40 3/4 x 67 1/2⁸ | 3,080 |

LEGEND

- ¹ certified using 8 1/2" x 11" 20 lb. bond and recommended power supply

² SSC (Smart Shred Control) a smiley face illuminates to indicate adequate sheet capacity levels during shredding process


³ ECC (Electronic Capacity Control) prevents paper jams by monitoring sheet capacity levels during shredding process

⁴ 20 amp. dedicated line required


⁵ transportation width (minus side tables) is 27 inches

⁶ 2 automatic speed modes


⁷ 50 amp. dedicated line required

⁸ depth with modular conveyor belt system is 121 inches
- 


Paper clips / staples



Plastic credit cards



CDs / DVDs



3-ring binders

DESKSIDE



CENTRALIZED OFFICE



WARRANTY

DESKSIDE & CENTRALIZED OFFICE SC & CC MODELS:

- lifetime limited warranty on cutting shafts and wheels
- 3 year limited warranty on all other parts, excluding wearables
- 90 day limited warranty on labor or exchange at MBM's discretion

HIGH CAPACITY AND SMC MODELS:


- 1 year limited warranty on cutting shafts and wheels
- 1 year limited warranty on all other parts, excluding wearables

SPECIAL SOLUTIONS MODELS:

- 1 year limited warranty, excluding wearables

SECURITY LEVELS

Shown in actual size according to DIN 66399 (standard for the destruction of data).

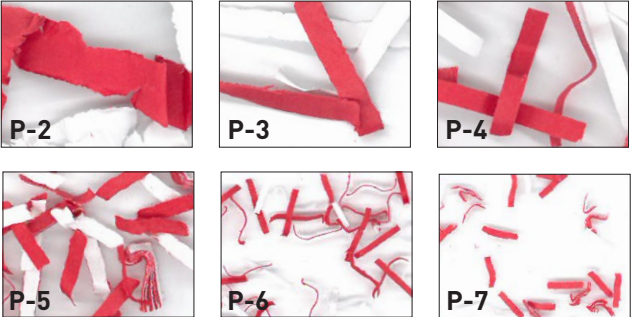



MBM
CORPORATION

3134 Industry Drive
North Charleston, SC 29418
843-552-2700
www.mbmcorp.com



IDEAL.MBM
CORPORATION

945B Southgate Drive
Guelph, ON N1L 0B9
800-387-2528
www.ideal-mbm.com

DESTROYIT.