

# VRCUT<sup>™</sup> Ready TRIUMPH<sup>®</sup>

# 5560 & 5560LT

Programmable cutter with hydraulic blade and clamp drive, power back gauge, digital touchpad, and IR safety light beams on front table. 5560 LT model equipped with front and rear air tables (available by special order only).



- A IR SAFETY CURTAIN**  
IR light beam safety curtain covers work area to ensure the highest level of operator safety.
- B ELECTRONIC HAND WHEEL**  
The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.
- C EASY CUT BLADE ACTIVATION BARS**  
Patented EASY CUT blade activation bars ensure true, two-hand operation and allow blade and clamp to be activated independently.
- D SWING CUT BLADE**  
The German high speed steel blade with swing cut movement provides the highest level of cutting accuracy.
- E HARDWARE KIT**  
Register on Lytrod.com to receive your free VRCut Hardware Kit. Everything you need, right out of the box.
- F ADJUSTABLE HYDRAULIC CLAMP**  
Clamping pressure is fully adjustable between 1,900 and 3,800 psi.

Register on  
Lytrod.com to  
receive your free  
VRCut Hardware  
Kit

www.mbmcorp.com  
843-552-2700



# VRCUT<sup>TM</sup> Ready TRIUMPH<sup>®</sup>

# 5560 & 5560LT

- Programmable cutter with hydraulic blade and clamp drive, power back gauge, digital touchpad
- Electric back gauge drive with touchpad for easy programming
- Stores 99 programs with up to 99 steps in each
- Pre-programmed for standard paper sizes
- Memory key for repeat cuts
- Automatic set function for reference measurement and eject function for pushing out paper
- Self-diagnostic system with error indication on display
- Bright, LED optical cutting line
- Automatic blade return from every position
- Disc brake for instant blade stop

**LYTROD**  
SOFTWARE

# VRCUT<sup>TM</sup>


**CUT WITH CONFIDENCE**



The VRCut solution consists of two independent modules that work together. The Impose module creates PDF documents formatted specifically to work with the VRCUT controller module. The controller module connects directly to the Triumph cutter moving the back gauge and visually guiding operators through the cutting sequence.

### Specifications:

Cutting width	21.6"
Cutting height	3.7" (3.6" w/ false clamp)
Narrow cut	1.2" (2.3" w/ false clamp)
Length behind blade	27.4"
Electrical requirements	115 V, 60 Hz 20 amp dedicated line
Dimensions (D x W X H)	55" x 42" x 54"
Width with side table (W)	64"

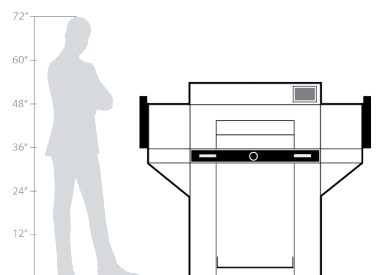

www.mbmcorp.com  
843-552-2700

