
AeroCut nano Max

Digital print finishing system with Tri-Suction Feed Mechanism featuring InstaSet bar and color touch screen with Flex Mode for accurate slitter positioning.









QUICK-RELEASE ROLLERS The AeroCut nanoMax has new

quick-release rollers and components, making cleaning easy. In case of a paper jam, this feature assists in a quick recovery.



TOUCH SCREEN UI

The nanoMax is equipped with a color touch screen. Cut mark registration and image shift & stretch compensation function help an operator to make fine adjustments to digitally printed stocks.

VERSATILE INSTASET BAR

The Bar indicates and aligns slitter positions accurately and can be easily adjusted manually without tools. Builtto-order bars are available for custom sized jobs, at lower cost compared to "slitter cartridges".



AeroCut nano Max


- Quick & easy tool-free slitter position settings with InstaSet Bar and new Fine Adjustment Knob
- Skew adjustment
- Cut-mark registration
- Double feed detection
- Intuitive touch screen operation
- Image shift & image stretch compensation
- 31 Preset jobs with 4 Factory InstaSet Bars included
- 80 custom job memories
- Easy access to slitter units and paper exit
- Quick and easy maintenance



BETTER Workflow

FASTER **Production Speed**

Motor

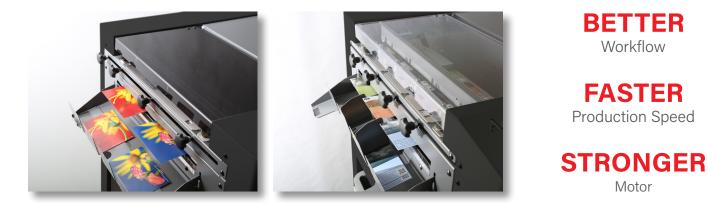


The AeroCut nanoMax comes with a one year license of Lytrod's Intellicut AeroCut nano Edition software. This software is a groundbreaking approach to efficiently operate and manage your document workflow. Add artwork & variable data to easily impose and seamlessly create PDF layouts with job setup details and cut marks for the AeroCut nano Max.

Specifications:

Speed	23 sheets/min*
Sheet capacity	1.2″
Paper weight	120-400 gsm. / 6-16 pt.*
Paper size	8.2" x 8.2" to 13" x 19"
Electrical requirements	100-120 V, 50/60 Hz
Dimensions (D x W X H)	25.7" x 30.2" x 39.8"
Weight	212 lbs.

* may vary due to variations in paper and power supply/paper coatings (varnish, UV, laminates, etc.)



www.mbmcorp.com 843-552-2700

