

# TRIUMPH® 4855

Professional programmable cutter with automatic clamp, power back gauge, and digital touchpad featuring EASY CUT blade activation.



Cutting  
←18.7"→  
width

*Shown with  
optional side tables*




- A TRANSPARENT SAFETY GUARD**  
A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.
- B ELECTRONIC HAND WHEEL**  
The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.
- C EASY CUT BLADE ACTIVATION BARS**  
Patented EASY CUT blade activation bars ensure true, two-hand operation and allow blade and clamp to be activated independently.
- D DIGITAL TOUCHPAD**  
The programmable control module is equipped with a multilingual touchpad for easy operation. 99 programs with 99 steps in each can be stored in memory.

www.mbmcorp.com  
843-552-2700



# TRIUMPH® 4855

- Comprehensive SCS safety package
- Digital measurement display with multilingual operator guidance, accurate to 1/10 mm or 1/100"
- Stores 99 programs with up to 99 steps in each program
- Pre-programmed for standard paper sizes
- Memory key for repeat cuts
- Automatic set function for reference measurement and eject function for pushing out paper
- Self-diagnostic system with error indication on display
- Bright, LED optical cutting line
- Automatic blade and clamp return from every position
- Disc brake for instant blade stop
- Blade and cutting stick can be changed without removing covers

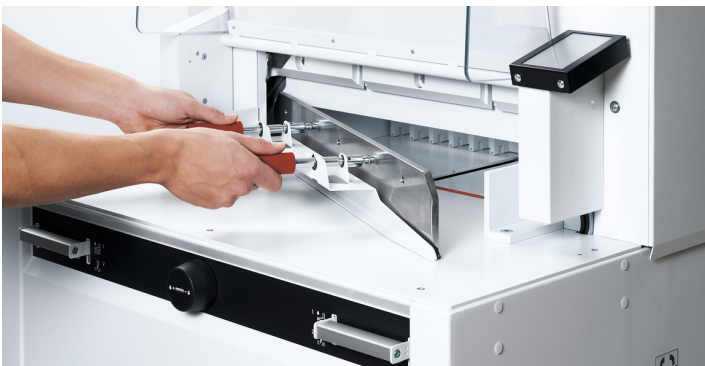

## Safe Blade Changes

Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.



## Tool Holder

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.

## Specifications:

Cutting width	18.7"
Cutting height	3.14"
Narrow cut	1.37"
Dimensions (D x W x H)	39" x 30" x 51"
Width with side tables (W)	53"



www.mbmcorp.com  
843-552-2700