

# VR*CUT*<sup>™</sup> Ready **TRIUMPH<sup>®</sup>**

# 6660

Programmable cutter with automatic clamp, power back gauge, digital touchpad, and IR safety light beams on front table.



- A IR SAFETY CURTAIN**  
IR light beam safety curtain covers work area to ensure the highest level of operator safety.
- B ELECTRONIC HAND WHEEL**  
The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.
- C EASY CUT BLADE ACTIVATION BARS**  
Patented EASY CUT blade activation bars ensure true, two-hand operation and allow blade and clamp to be activated independently.
- D SAFE BLADE CHANGES**  
Blade changes can be made without removing machine covers. Handy blade changing device covers the cutting edge of blade.
- E HARDWARE KIT**  
Register on Lytrod.com to receive your free VR-Cut Hardware Kit. Everything you need, right out of the box.

Register on  
Lytrod.com to  
receive your free  
VR*CUT* Hardware  
Kit

www.mbmcorp.com  
843-552-2700



# VRCUT<sup>TM</sup> Ready TRIUMPH<sup>®</sup>

66660

- Programmable cutter with automatic clamp
- Stores 99 programs with up to 99 steps in each
- Pre-programmed for standard paper sizes
- Memory key for repeat cuts
- Automatic set function for reference measurement and eject function for pushing out paper
- Self-diagnostic system with error indication on display
- Bright, LED optical cutting line
- Automatic blade and clamp return from every position
- Disc brake for instant blade stop
- Blade and cutting stick can be changed without removing covers

LYTROD<sup>™</sup>  
SOFTWARE

# VRCUT<sup>TM</sup>


**CUT WITH CONFIDENCE**



The VRCut solution consists of two independent modules that work together. The Impose module creates PDF documents formatted specifically to work with the VRCUT controller module. The controller module connects directly to the Triumph cutter moving the back gauge and visually guiding operators through the cutting sequence.

### Specifications:

Cutting width	25.5"
Cutting height	3"
Narrow cut	1"
Length behind blade	24"
Electrical requirements	115 V, 60 Hz 20 amp dedicated line
Dimensions (D x W X H)	48" x 39" x 51"
Width with side table (W)	61.5"

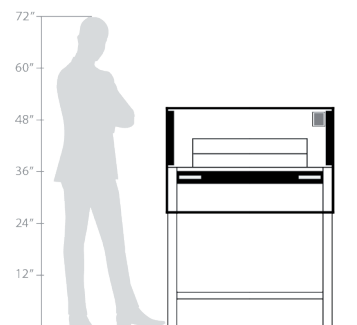

www.mbmcorp.com  
843-552-2700

